



EN

Compact Pumps

Hidrostat Screw Centrifugal Compact Pumps are portable, heavy duty field units which combine usability and robustness with the superior hydraulic and solid handling performance of the famous screw centrifugal impeller.



Compact Pumps - small, portable and ready to use whenever needed.

Hidrostal compact pumps allow non-clogging, trouble-free operation in demanding situations. They are used in slurry and wastewater applications, by emergency management / fire brigades, on construction sites and even in private households.

Hidrostal compact pumps are heavy duty field units which combine usability and robustness with the superior hydraulic and solid handling performance of the famous screw centrifugal impeller. This makes it the preferred pump for all type of municipal and industrial wastewater, slurry and mud but also flood defense applications for portable but also stationary installations.

Typical Applications

- Industrial effluent
- Viscous sludge
- Return activated sludge
- Drainage
- Process waste
- Sump cleanup
- Construction sites
- Flood defense
- Emergency management / fire brigades

Specifications

- Discharge Sizes: 50–80 mm (2–3")
- Suction Sizes: 50–80 mm (2–3")
- Head: 0.5–17.7 m (1.6 – 58 ft)
- Flow: 0.8–24.6 l/s (12 – 390 gpm)
- Power: 0.1–2.4 kW (0.1–3.2 HP)
- Frequencies: 50 Hz, 60 Hz, VFD
- Voltage 3 Phase 380V, 400V, 415V, 460V, 480V, 575V
- Materials: Cast Iron, Ductile Iron, Hi-Chrome, Stainless Steel, Duplex




Name	Best Efficiency Point		Free ball passage	Material		Ex protection	Weight
	Head	Flow Rate		Cast iron	Duplex		
A2U	up to 11.4 m (37 ft)	up to 9.3 l/s (147 gpm)	50mm (2")	X			23Kg (50.7 lbs)
A2Q	up to 9.5 m (34 ft)	up to 9.5 l/s (150 gpm)	50mm (2")		X		32Kg (70.5 lbs)
BE2/BN2	up to 10.1 m (33 ft)	up to 8 l/s (126 gpm)	50mm (2")	X		X	32Kg (70.5 lbs)
BK3/BN3	up to 13.5m (44 ft)	up to 10.8 l/s (171 gpm)	up to 75mm (3")	X		X	40Kg (88 lbs)

Product Highlights

Product Advantages

- Powerful, up to 17.7 m (58ft) or up to 24.6 l/s (390gpm)
- Mobile with a weight of 23 kg (50.7 lbs) including 5 m (17 ft) cable
- Free ball passage for solids handling of 50 mm to 75 mm (2" - 3") in diameter
- Robust unit capable of handling liquids containing fibrous material
- Steep curve giving pressure and power reserve when pumping thick materials
- Motor efficiency up to IE3 equivalent
- High efficiency and compact construction
- Non-overloading power curve
- Double mechanical seal arrangement
- Ex-proof execution available

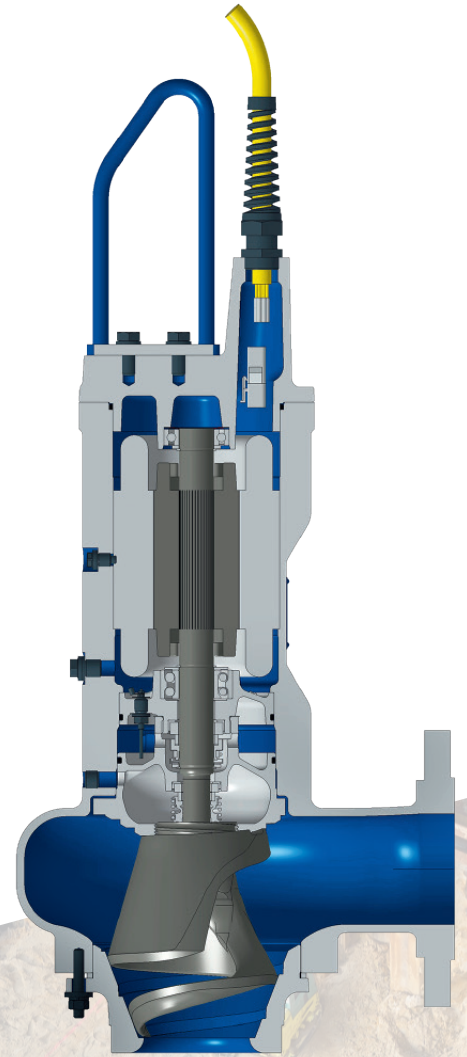

Available in New Zealand from:
Prime Fluid Management

Greymouth

(Head Office)
10 Chesterfield St

Wellington

9 Broken Hill Rd
Kenepuru, Porirua

Auckland

13b Mclaughlins Rd
Wiri

Christchurch

Unit C1, 198
Springs Rd Hornby

Tauranga

43 Poturi St
Tauriko

Hawke's Bay

97 Austin St
Onekawa, Napier

0800 482 747
info@primefluid.co.nz
primefluid.co.nz



Find out more
about Hidrostral pumps
in New Zealand

