

CPC-*line*

Stainless steel centrifugal pumps
for hygienic process applications, according to EHEDG



Pomac Pumps

The **CPC-line** is designed for applications in the pharmaceutical and food industry, with a strong focus on optimal cleanability, efficiency, low maintenance costs and a simple (dis)assembly.

The **CPC-line** is characterised by its elegant but robust and stable build, which makes the **CPC-line** extremely suited for all occurring production processes in the pharmaceutical and food processing industry.

Ultra clean

All liquid contact parts of the CPC pumps are compliant with the relevant standards. The open impellers are provided with pressure relief holes, which at the same time ensure an optimal cleaning of the shaft seal and of the seal chamber. The impeller is 'dry' mounted to the shaft by means of "O"-rings. The applied "O"-ring constructions are designed to minimise the liquid contact and at the same time to provide an optimal cleaning of the contact faces.

Efficiency

The **CPC-line** is designed with narrow gaps, whereas the eminently manufactured impellers ensure very favourable efficiencies.

Depending on the application range but always compliant with the hygienic standards the **CPC-line** can be executed with several options:

- Mechanical seal types and materials
- "O"-ring materials
- Surface roughness
- Drain constructions
- Heating jacket

CPC-line HD

This is the high pressure version of the **CPC-line**. This pump has been developed as a booster pump for high pressure systems to 40 bars. Its external dimensions are equal to the **CPC-line**.

Materials

All parts that come into contact with the pumped liquid are made of stainless steel, Materials nr. 1.4404. At request these parts can also be made of Materials nr. 1.4435 or Materials nr. 2.4602 (Hastelloy C22).

Drives

KAM and KAV are supplied with B3/B5 foot and flange mounted motors according to IEC, with balanced stainless steel stub shaft.

KAC is supplied with B5 flange mounted motors according to IEC with balanced stainless steel stub shaft (only available upto motor size IEC 132).

Motors can be supplied in all available efficiency, isolation, protection and voltage classes. Also available in ATEX compliant version and in noise-reduced execution.

IG can be supplied with either electric, pneumatic or combustion motors.

IGH is equipped with hydraulic motor.





Applications

Food Industry

- **Dairies**
Milk, skimmed milk, butter milk, cheese milk, raw milk, cream, animal fats
- **Beverages**
Fruit juices, soft drinks, beer, wine, spirits, liqueur, sugar solutions, syrups, water, concentrates, yeast
- **Foodstuffs**
Animal and vegetable oils and fats, soups, sauces, spices, brine, water
- **Chocolate and sweets**
Milk products, oils and fats, sugar solutions, syrups, flavouring, liqueur, spirits
- **Sugar**
Syrups, sugar solutions, invert sugar
- **CIP & SIP cleaning processes**
Sodium hydroxide, nitric acid, hot and cold water, other specific cleaning liquids



Pharmaceutical Industry and Biotechnology

- Ultra filtration
- Reactors
- Tablets and coating
- Process filtration

Typical pharmaceutical applications

- Sugar solutions, syrups
- Alcohols, solvents, acids
- Distilled water, emulsions
- Nutrient solutions, suspensions




Shaft sealing systems


The mechanical seals are available in the following materials combinations:

- carbon to CrMo-steel
- carbon to silicon carbide
- carbon to ceramic
- hard metal to hard metal
- silicon carbide to silicon carbide
- Tungsten carbide to tungsten carbide


The mechanical seals are available with EPDM, Viton, Perbunan and Teflon "O"-rings.
All materials comply with FDA - CFR 21 or the equivalent european standards.




1. Internal mechanical seal

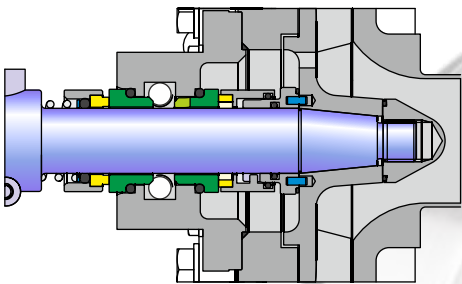


2. Internal mechanical seal with quench







3. External mechanical seal

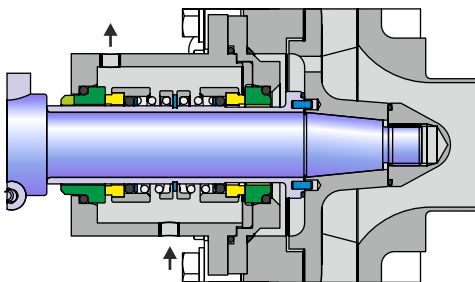

4. External mechanical seal with flush

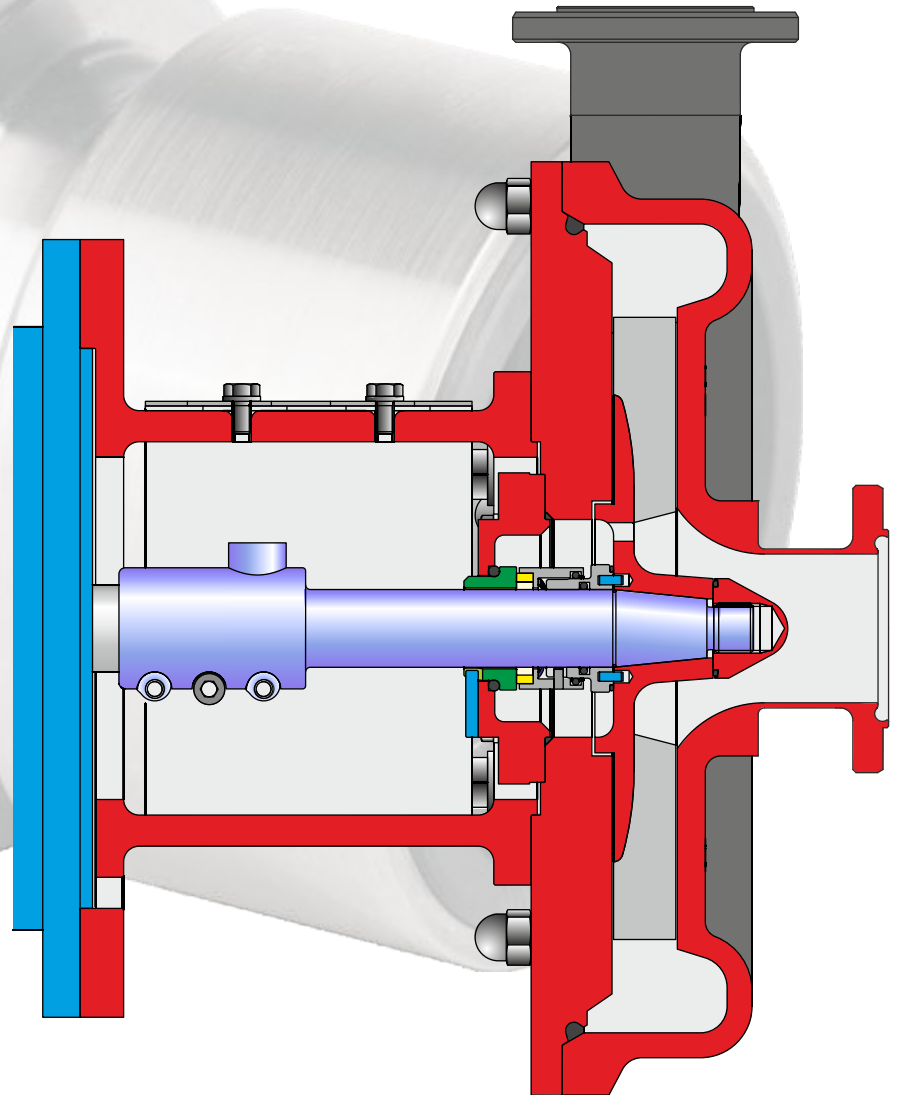


Curves

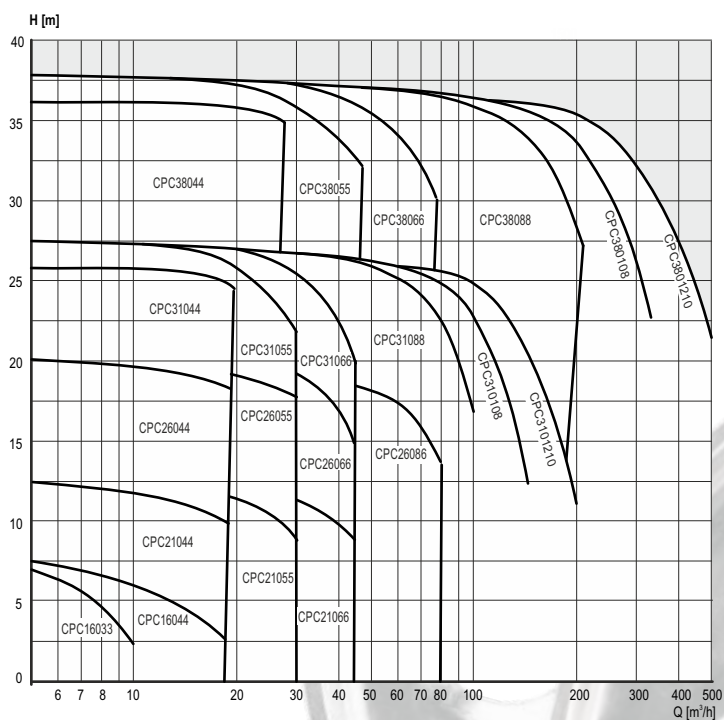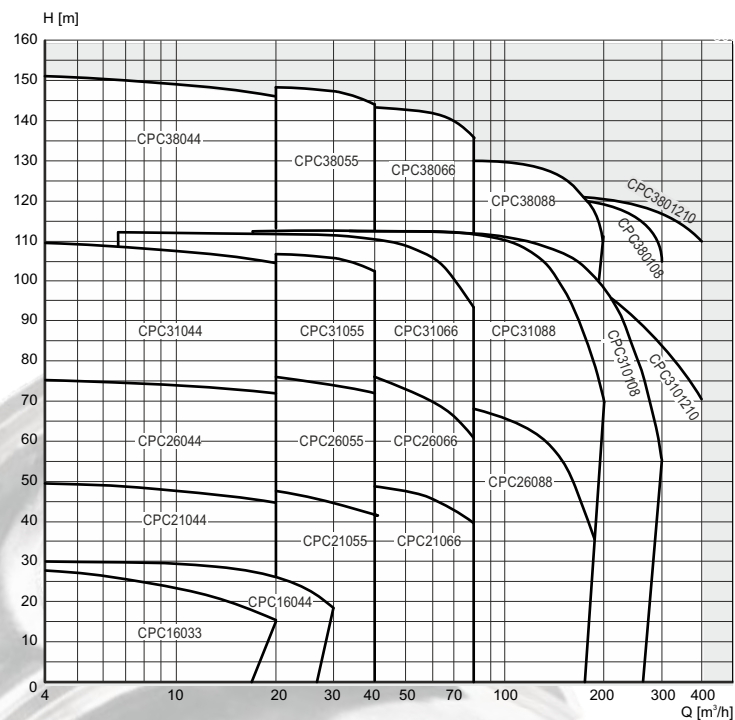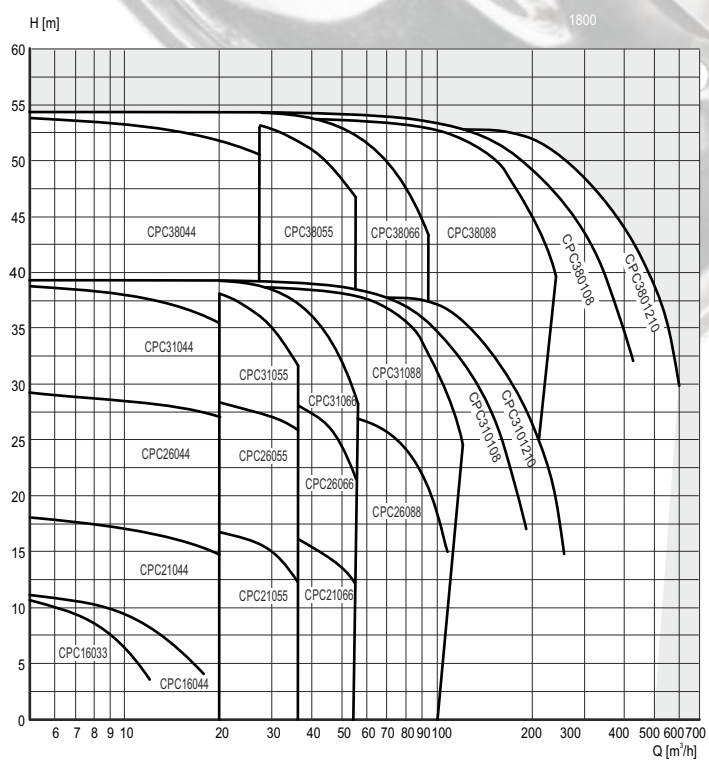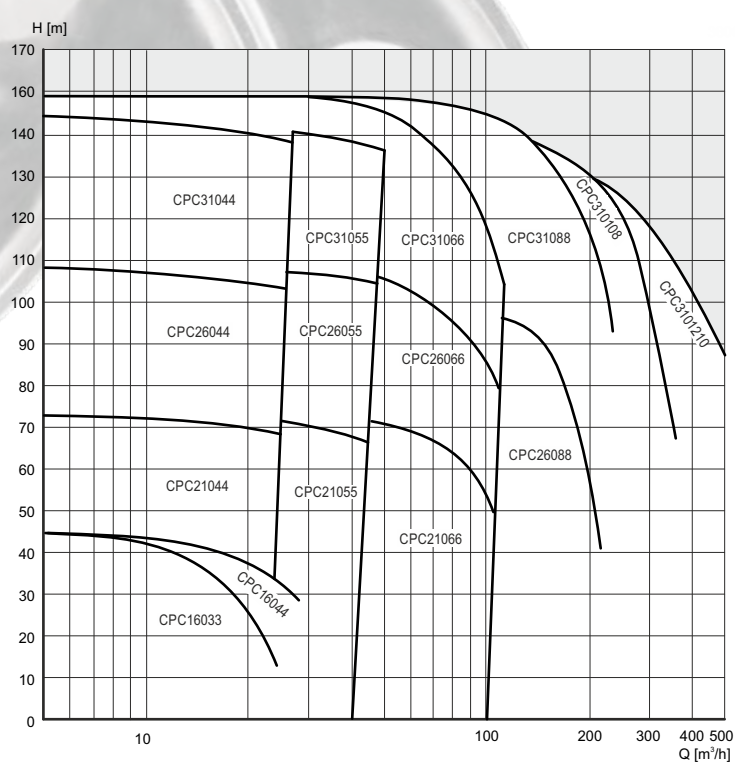
1500 min⁻¹3000 min⁻¹1800 min⁻¹3600 min⁻¹

Dimensions


CPC - KAM

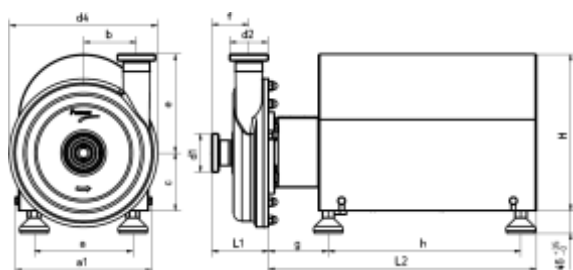


CPC - KAC

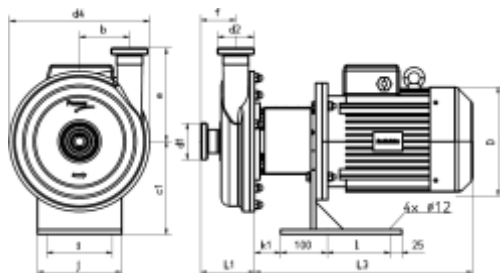


CPC - KAV

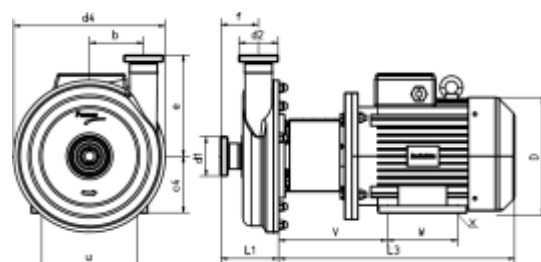

CPC - IG

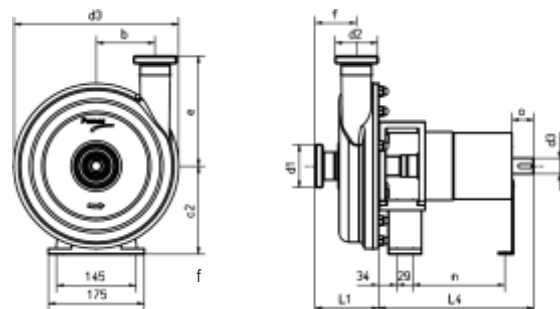

CPC - IGH

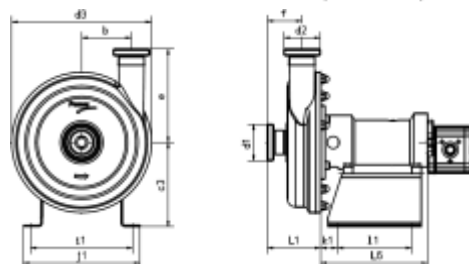

Motor size IEC	Power [kW]				Build-in dimensions motors																		
	3000	1500	1000	750	a	a1	c	c1	c4	D	g	h	H	i	j	k1	l	u	V	W	x	L2	L3
80-A	0,75	0,55	0,37	0,18	160	228	85	180	80	150	110	368	246	120	150	43	110	125	185	100	10	458	361
80-B	1,1	0,75	0,55	0,25																		373	
90S	1,5	1,1	0,75	0,37	160	228	95	180	90	176	110	368	246	120	150	43	110	140	191	100	10	458	415
90L-2	2,2			0,55																		415	
90L-4,6,8		1,5	1,1																			440	
100L-2,4A	3	2,2			200	278	105	194	100	202	121	390	316	140	180	53	135	160	208	140	12	543	505
100L-4B		3																				525	
100L-6,8A			1,5	0,75																		461	
100L-8B				1,1																		0	
112M-2,6,8	4		2,2	1,5	200	278	117	194	112	233	121	390	316	140	180	53	135	190	215	140	12	543	459
112M-4		4																				486	
132S-2A,6,8	5,5		3	2,2	250	328	137	219	132	266	121	452	356	160	230	73	165	216	254	140	12	605	548
132S-2B,4	7,5	5,5																				586	
132M-4,6A,8		7,5	4	3																		0	
132M-6B			5,5																			0	
160M	11	11	7,5	4	320	390	183		160	316	198	447	443					254	308	210	15	772	702
			5,5																			35	
160L		15	11	7,5																		746	
180M	22	18,5			320	390	203		180	350	198	447	520					279	321	241	15	902	795
180L		22	15	11																		35	
200L	30	30	18,5		370	445	223		200	406	206	520	570					318	343	305	19	975	950
	37		22																			35	
200L-8			15																			925	
225M-2	45				416	490	248		225	485	213	521	615					356	351	311	19	1050	1030
225S-4		37																				1060	
225M-4,6		45	30																			1060	
225S-8			18,5																			965	
225M-8			22																			990	
250M-2	55				450	585	255		250	520	326	510	695					406	408	349	24	1198	1110
250M-4		55																				1140	
250M-6			37																			1140	
250M-8			30																			1065	
280S-2	75				510	680	285		280	596	352	580	775					457	408	368	24	1318	1235
280S-4,6		75	45																			1235	
280S-8			37																			1140	
280M-2	90																					1235	
280M-4,6		90	55																			1235	
280M-8			45																			1140	

Dimensions

Pump

Size	d1	d2	d alt.	d4	NW1	NW2	b	e	f	L1
16033	1,5"	1,5"		200	40	40	68	148	67	98
16044	2"	2"	1,5"	200	50	50	68	148	69	100
21044	2"	2"		250	50	50	82	168	75	115
21055	2,5"	2,5"	2"	250	65	65	82	170	80	120
21066	3"	3"	2",2,5"	250	80	80	82	170	80	120
26044	2"	2"		300	50	50	107	198	75	115
26055	2,5"	2,5"	2"	300	65	65	107	200	80	120
26066	3"	3"	2",2,5"	300	80	80	107	200	80	120
26086	4"	4"	3"	300	100	80	100	200	106	161
31044	2"	2"		350	50	50	133	222	75	115
31055	2,5"	2,5"	2"	350	65	65	133	225	80	120
31066	3"	3"	2",2,5"	350	80	80	133	225	80	120
31088	4"	4"	3"	350	100	100	120	225	106	161
310108	5"	4"	3"	350	125	100	120	225	98	153
3101210	6"	5"	3"	350	150	125	120	225	95	157
38044	2"	2"		425	50	50	168	275	75	117
38055	2,5"	2,5"		425	65	65	168	275	80	122
38066	3"	3"		425	80	80	168	275	80	122
38088	4"	4"		425	100	100	151	275	101	162
380108	5"	4"		425	125	100	151	275	101	162
3801210	6"	5"		425	150	125	151	275	101	162

Connections

All pump types can be supplied with:


- Couplings acc. to DIN 11851, DIN 11864-1, SMS, etc.
- Tube connections acc. to NEN 1472 and DIN 1850
- Flange connections acc. to EN 1092-1, DIN 11864-2
- Tri-clamp acc. to ISO 2852, DIN 32676 and DIN 11864-3
- Connections according to client specifications.

Configurations

The pumps can be supplied with the following, entirely interchangeable, options:

- CPC-line KAM** Pump with close coupled stainless steel encased motor and fitted with adjustable stainless steel legs.
- CPC-line KAC** Pump with close coupled motor, mounted on a stainless steel bracket.
- CPC-line KAV** Pump with close coupled motor, mounted on the motor feet.
- CPC-line IG** Pump fitted to a bearing housing.
- CPC-line IGH** Pump fitted to a stainless steel bearing housing, especially suited for a direct coupled hydraulic drive.

Bearing bracket IG												
c2	d3	o	n	L5	m7	m8	m9	m10	m11	m12	m13	m14
100	24	30	168	295	135	0	266	50		19j6	40	130
							278					
100	24	30	168	295	135	0	330	56		24j6	50	153
							330					
							355					
100	24	30	168	295	145	0	420	63		28j6	60	172
							440					
							376					
112	24	30	168	295	145	0	384	70		28j6	70	174
							411					
132	24	30	168	295	145	20	463	89		38k6	80	182
							501					220
160	38	50	258	399	145	55	612	108		42k6	110	256
							656					300
180	38	50	258	399	145	55	705	121		48k6	110	320
200	38	50	258	399	145	65	850	133		55m6	110	380
							825					
225	38	50	258	399	145	65	930	149	345	55m6	110	380
						95	960			60m6	140	
						95	960				140	
							865		310			355
							890					380
					145	95	1010	168		60m6	140	446
							1040			65m6		
							1040					
						145	95	1135	190	65m6	140	520
							1135			75m6		
							1040					
							1135			65m6		
							1135			75m6		
							1040					

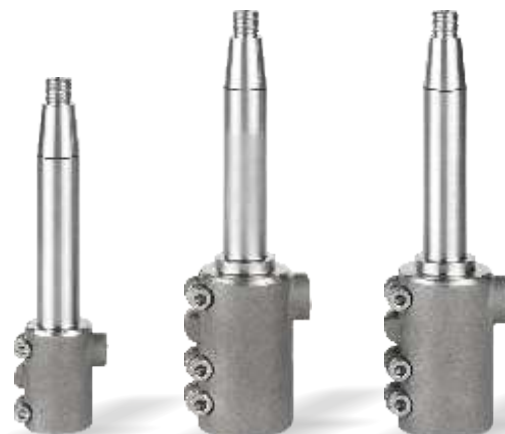

Besides the CPC-line pump assortment in this brochure the Pomac delivery program comprises an extensive choice of hygienic pumps.

More detailed information on these pump types is available and will be sent to you on request.

CPC-ZA
Self-priming stainless steel centrifugal pump

Q max = 200 m³/h
H max = 90 m



SP-LR
Self-priming liquid ring pump

Q max = 60 m³/h
H max = 50 m



PLP
Lobe pump

Q max = 110 m³/h
P max = 25 bar



PDSP
Double screw pump

Q max = 90 m³/h
P max = 16 bar



CP-AGF
Pump with channel impeller

Q max = 1000 m³/h
H max = 25 m



Available in New Zealand from:
Prime Fluid Management

0800 482 747
info@primefluid.co.nz
primefluid.co.nz

