
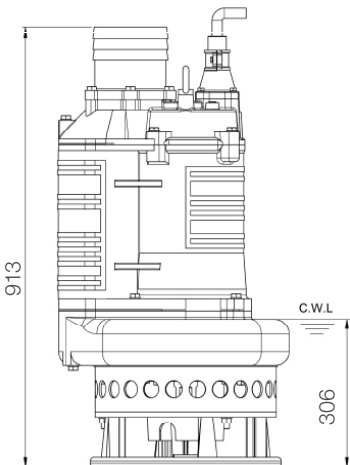


Stormy 6110P


Open Stand and Agitator Pump 50HZ

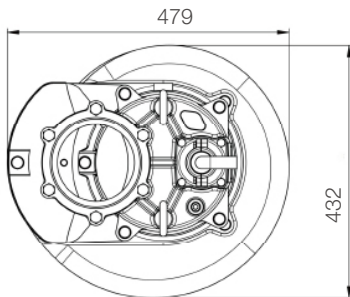

unit : mm
 Weight : 192kg

Pump specifications

OUTPUT	HEAD	FLOW
11kW	Rated : 17m, 56ft	Rated : 31.7 L/s, 502 gpm
15HP	Max : 22m, 72ft	Max : 61.6 L/s, 977 gpm
SHAFT SPEED		1450rpm
OUTLET		150mm, 6in
SOLID PASSAGE		35mm, 1.4in

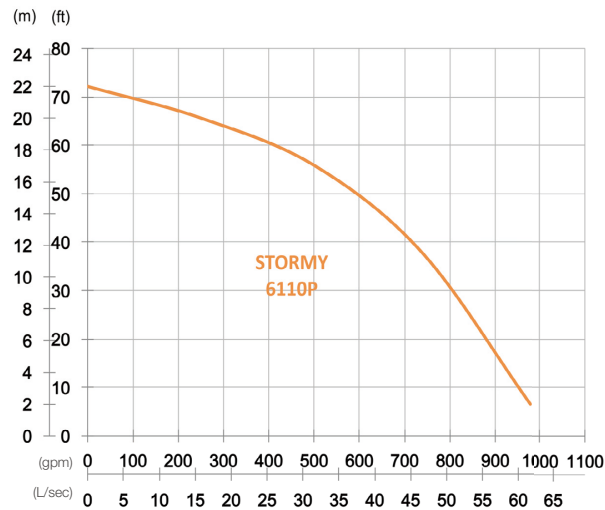

Features

Pump Type
 Electric Submersible Pumps
 3-Phase

Motor
 Type: Induction Motor
 Poles: 4 Pole
 Insulation: Class F
 Protector: Circle Thermal Protector
 Starter: D.O.L.

Lubricant
 Food Grade (ISO VG32)

Impeller Type
 Opened

Shaft Seal
 Double Mechanical Seal
 Silicon Carbide VS Ceramic / Carbon

Bearings
 C3 Shielded ball bearings

Cable
 PVC (CSA Certified) / H07BQ-F
 10m or longer upon request

Materials
 Pump Casing: Ductile Iron
 Impeller: Chromium Iron
 Motor Frame: Gray Iron
 Motor Shaft: Stainless Steel
 Wear Plate: Chromium Iron
 Agitator: Chromium Iron

Max. Liquid Temperature
 40°C

Max. Submersion Depth
 20m

pH Range
 pH 5 - pH 8