
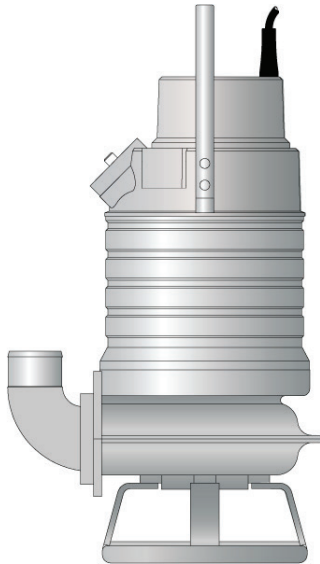


Senior Inox

Stainless Steel Submersible Sludge Pump



Pump specifications

Type	Senior Inox
50Hz	Senior Inox
Discharge connection	4"
Rated Power P _r (kW)	4.1
Max. power consumption P _f (kW)	5.2
Shaft speed (r.p.m.)	1350
Rated current at 230V	15 A
Rated current at 400V	8.8 A
Rated current at 500V	7.7 A
Solids passage (mm)	80
Height (mm)	755
Diameter (mm)	480
Weight (kg)	86

Other voltages on request

Features

General description

Submersible sludge pump made of stainless steel for mines, processing industries and salt-water applications

Classification

Electrical submersible pump
Protection Class: IP68

Electrical motor

Squirrel cage induction motor. Insulation Class: F (IEC 85)

Motor protection

Phase sequence control, phase failure guard, temperature guard with thermal contacts in the stator (= SMART system).
Air valve

Cable - SubCab 20 m (66 ft)

50Hz - 60Hz: 4G2.5mm² - AWG14/4

Limitations


Max. submersion depth: 20m (66ft)
Max. liquid temperature: 40°C (104°F)
Allowed pH range: 2 - 10
Maximum liquid density: 1100kg/m³ (68lbs/ft³)

Shaft Seals

Double mechanical shaft seals running in an oil compartment
Material lower seal: silicon carbide - silicon carbide
Material upper seal: carbon - silicon carbide

Bearings

Ball bearings with C3 clearance

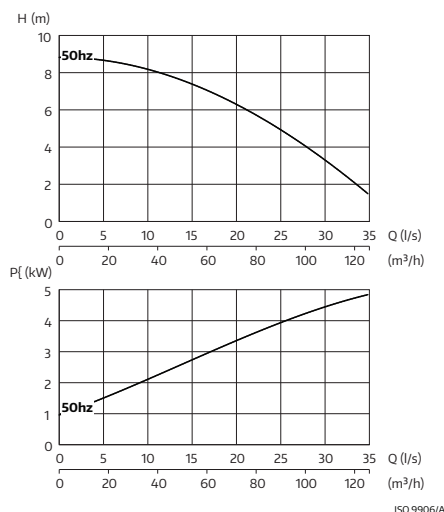

Discharge connection

3" hose, ISO-G BSP or NPT

Materials

Casted parts: Stainless steel (EN 10283-1.4412-ASTM CF-8M)
Outer casing: Stainless steel (EN 10088-3-1.4436-AISI 316L)
Motor shaft: Stainless steel (EN 10088-3-1.4460-AISI 329)
Impeller: Stainless steel (EN 10283-1.4412-ASTM CF-8M)
Screws and nuts: Stainless steel (A4)
O-rings: Viton rubber
Pump housing liner: Nitrile rubber

Accessories

Zinc anodes