

GOCUT 208




Sewer Cutter Pump 50Hz

PRORIL



Pump specifications

OUTPUT	HEAD	FLOW
0.75kW	Rated : 8m	Rated : 3.3L/s
1HP	Max : 10m	Max : 6.7L/s
SHAFT SPEED		2850rpm
OUTLET		50mm
SOLID PASSAGE		26mm

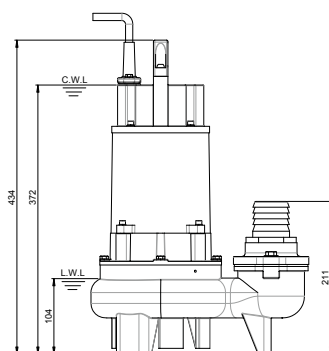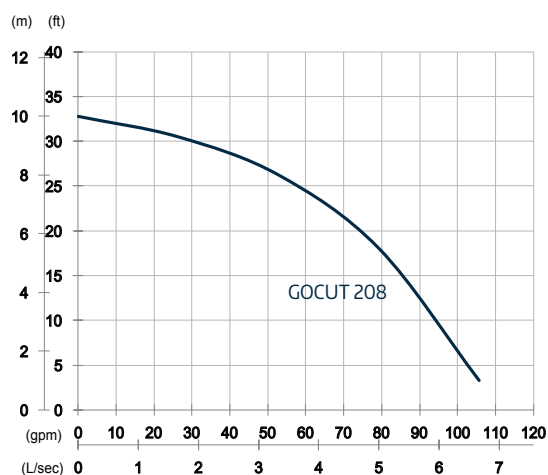

unit : mm

Weight : 22kg

Features

Pump Type

Electric Submersible Pumps
1-Phase, 3-Phase

Motor

Type: Induction Motor
Poles: 2 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: 1-Phase · Capacitor-Run,
3-Phase · D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Semi-Open Channel Cutter

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07RN-F
6m or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8

Guide Rail

GRL-02F

GOCUT 215




Sewer Cutter Pump 50Hz

PRORIL



Pump specifications

OUTPUT	HEAD	FLOW
1.5kW	Rated : 8m	Rated : 5.8L/s
2HP	Max : 16m	Max : 8.3L/s
SHAFT SPEED		2850rpm
OUTLET		50mm
SOLID PASSAGE		27mm

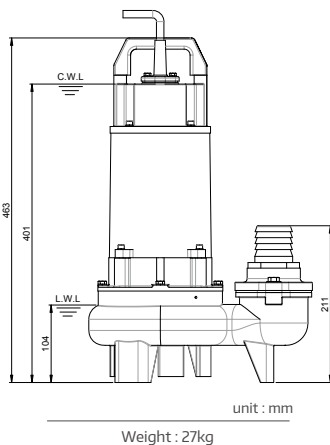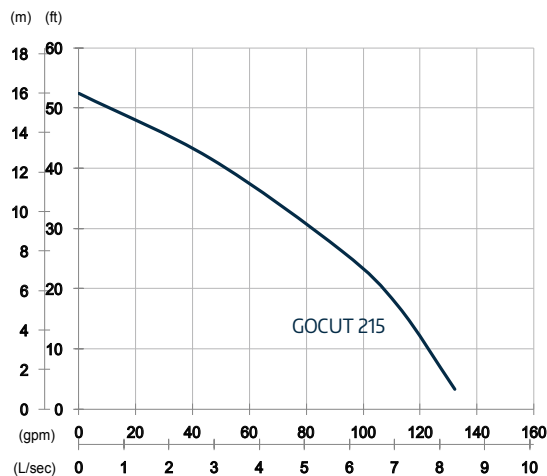

Weight : 27kg

Features

Pump Type

Electric Submersible Pumps
1-Phase, 3-Phase

Motor

Type: Induction Motor
Poles: 2 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: 1-Phase · Capacitor-Run,
3-Phase · D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Semi-Open Channel Cutter

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07RN-F
6m or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8

Guide Rail

GRL-02F

GOCUT 315




Sewer Cutter Pump 50Hz

PRORIL



Pump specifications

OUTPUT	HEAD	FLOW
1.5kW	Rated : 8m	Rated : 6.7L/s
2HP	Max : 16m	Max : 10.8L/s
SHAFT SPEED		2850rpm
OUTLET		80mm
SOLID PASSAGE		27mm

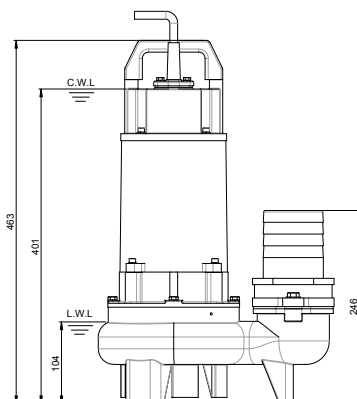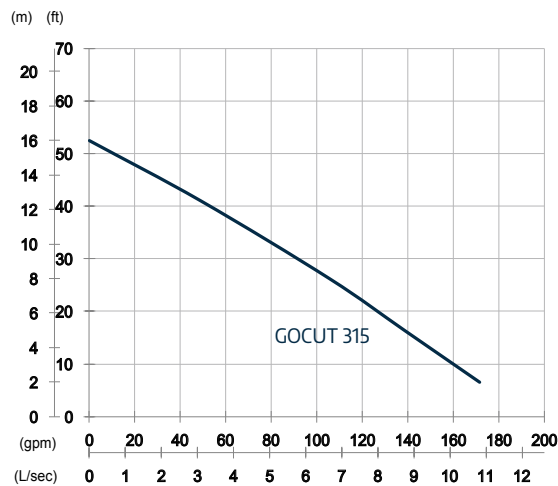

unit : mm

Weight : 27kg

Features

Pump Type

Electric Submersible Pumps
1-Phase, 3-Phase

Motor

Type: Induction Motor
Poles: 2 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: 1-Phase · Capacitor-Run,
3-Phase · D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Semi-Open Channel Cutter

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07RN-F
6m or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8

Guide Rail

GRL-03F

GOCUT 322


Sewer Cutter Pump 50Hz

PRORIL



Pump specifications

OUTPUT	HEAD	FLOW
2.2kW	Rated : 10m	Rated : 10L/s
3HP	Max : 18m	Max : 15L/s
SHAFT SPEED		2850rpm
OUTLET		80mm
SOLID PASSAGE		27mm

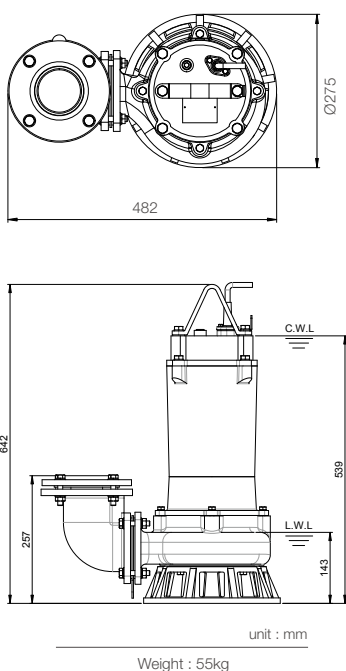

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 2 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Semi-Open Channel Cutter

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07RN-F
10m or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8

Guide Rail

GRF-03

GOCUT 337




Sewer Cutter Pump 50Hz

PRORIL



Pump specifications

OUTPUT	HEAD	FLOW
3.7kW	Rated : 13m	Rated : 10.8L/s
5HP	Max : 20m	Max : 20L/s
SHAFT SPEED		2850rpm
OUTLET		80mm
SOLID PASSAGE		37mm

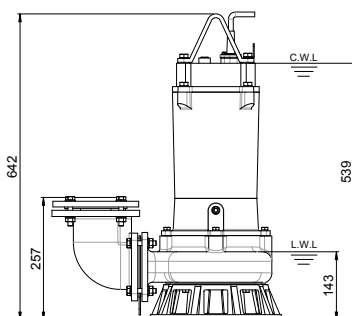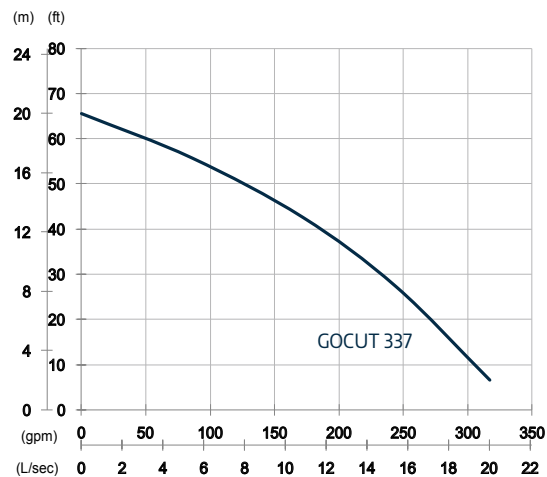

unit : mm
Weight : 60kg

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 2 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Semi-Open Channel Cutter

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07RN-F
10m or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8

Guide Rail

GRF-03

GOCUT 437



Sewer Cutter Pump 50Hz

PRORIL



Pump specifications

OUTPUT	HEAD	FLOW
3.7kW	Rated : 14m	Rated : 11.7L/s
5HP	Max : 18m	Max : 21.7L/s
SHAFT SPEED		2850rpm
OUTLET		100mm
SOLID PASSAGE		37mm

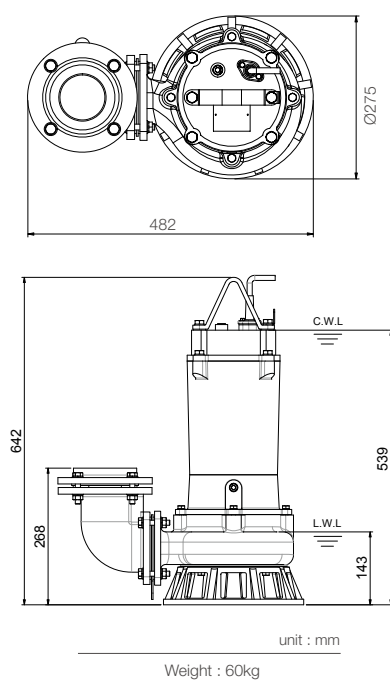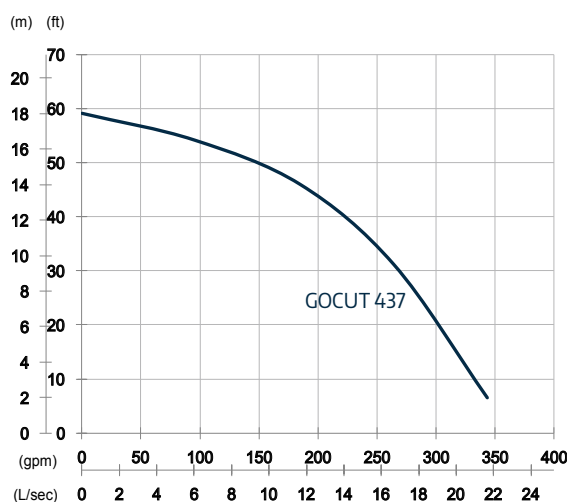

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 2 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Semi-Open Channel Cutter

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07RN-F
10m or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8

Guide Rail

GRF-04