

Tank 8370




Submersible Dewatering Pump

PRORIL



Pump specifications

OUTPUT	HEAD	FLOW
37kW	Rated : 40m	Rated : 60L/s
50HP	Max : 50m	Max : 91.6L/s
SHAFT SPEED		2850rpm
OUTLET		200mm
SOLID PASSAGE		20mm

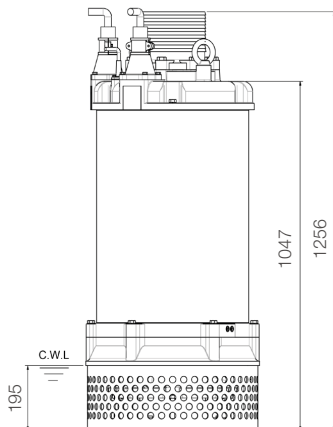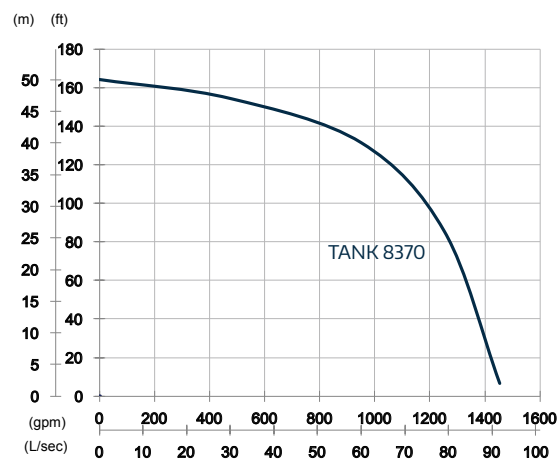

unit : mm

Weight : 510kg

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 2 Pole
Insulation: Class F
Protector: D.O.L. · Circle Thermal Protector
Star-Delta · Miniature Thermal Sensor
Starter: D.O.L.

Lubricant

Food Grade (ISO VG32)

Impeller Type

Closed

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic / Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified) / H07BQ-F
10m or longer upon request

Materials

Pump Casing: Ductile Iron
Impeller: Chromium Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Outer Case: Carbon Steel
Strainer: Carbon Steel

Max. Liquid Temperature

40°C

Max. Submersion Depth

20m

pH Range

pH 5 - pH 8