

GOMAX 337



Single Channel Sewage Pump 50Hz

PRORIL



Pump Specifications

OUTPUT	3.7KW	5HP
HEAD	Rated: 12.5m	Max: 20.4m
FLOW	Rated: 13.3L/s	Max: 25L/s
SHAFT SPEED	1450rpm	
OUTLET	80mm	

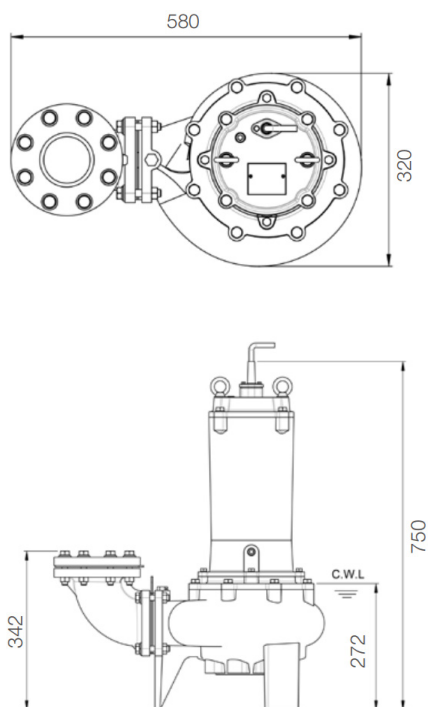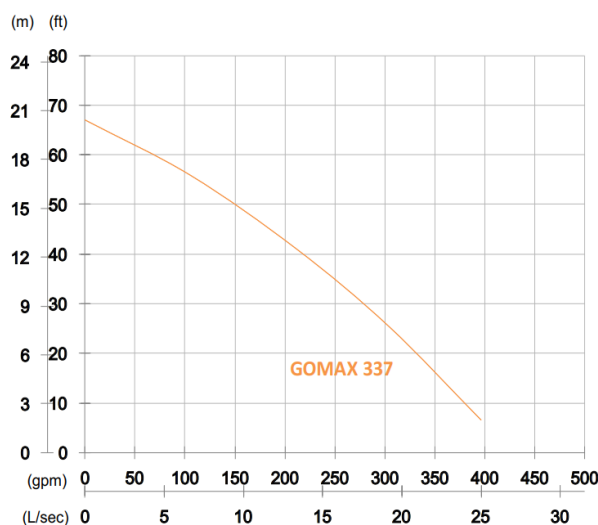

unit : mm

Weight : 94kg / 207 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8


Accessories

GRN-03

GOMAX 437

Single Channel Sewage Pump 50Hz

PRORIL

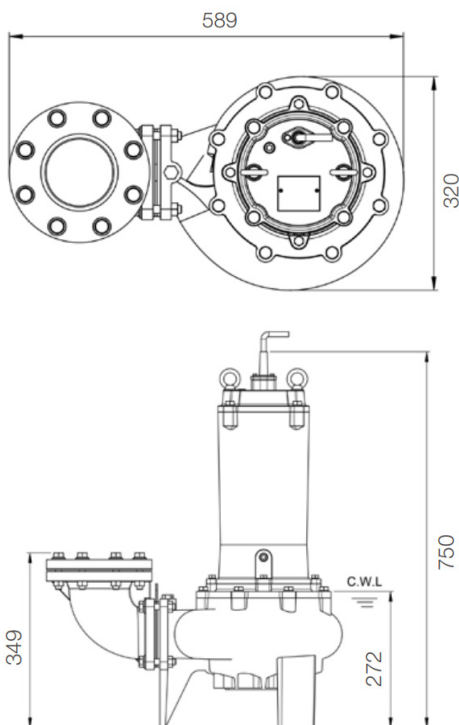


unit : mm

Weight : 97kg / 214 lbs

Pump Specifications

OUTPUT	3.7KW	5HP
HEAD	Rated: 11.1m	Max: 19.6m
FLOW	Rated: 20L/s	Max: 36.6L/s
SHAFT SPEED	1450rpm	
OUTLET	100mm	

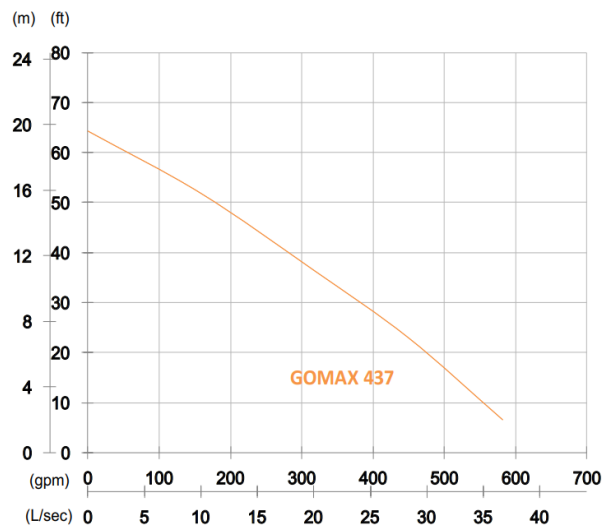

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Circle Thermal Protector
Starter: D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8

Accessories

GRN-03

GOMAX 455



Single Channel Sewage Pump 50Hz

PRORIL



Pump Specifications

OUTPUT	5.5kW	7.5HP
HEAD	Rated: 14m	Max: 21m
FLOW	Rated: 20L/s	Max: 40L/s
SHAFT SPEED	1450rpm	
OUTLET	100mm	

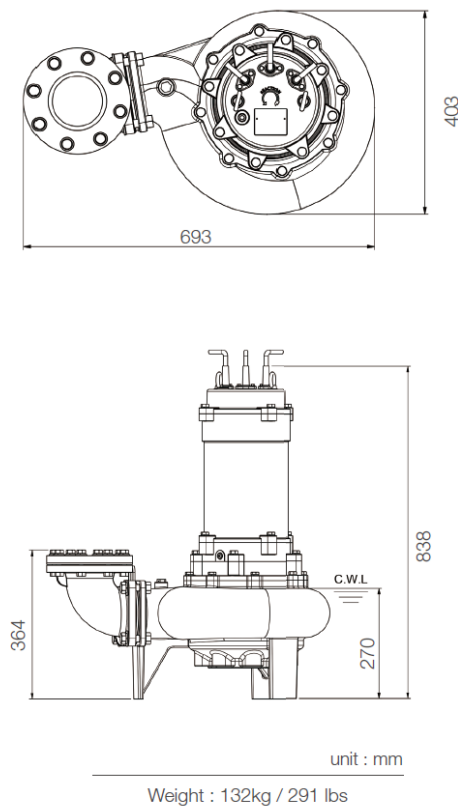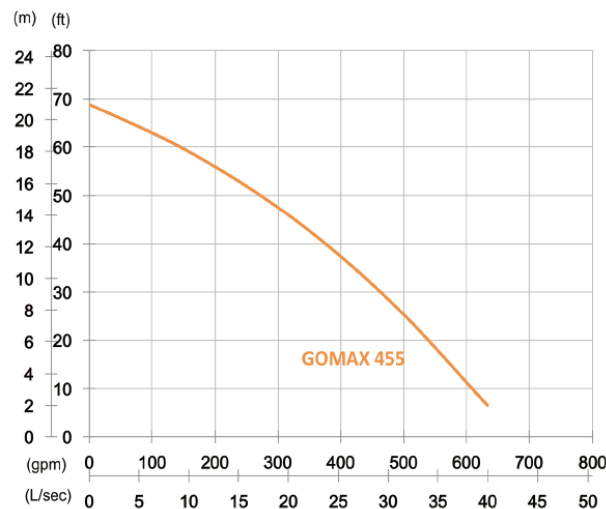

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature
40°C

Max Submersion Depth
20m

pH Range
pH 5 - pH 8

Accessories
GRN-04

GOMAX 655




Single Channel Sewage Pump 50Hz

PRORIL



Pump Specifications

OUTPUT	5.5KW	10HP
HEAD	Rated: 12m	Max: 21m
FLOW	Rated: 28.3L/s	Max: 56.6L/s
SHAFT SPEED	1450rpm	
OUTLET	150mm	

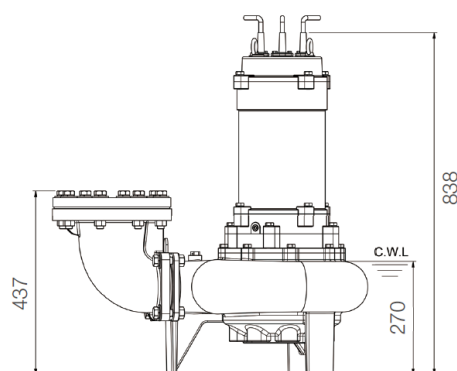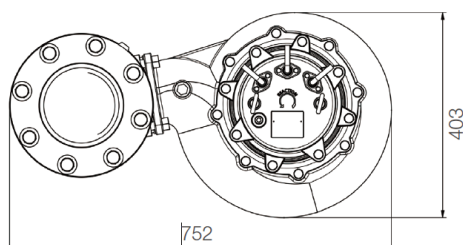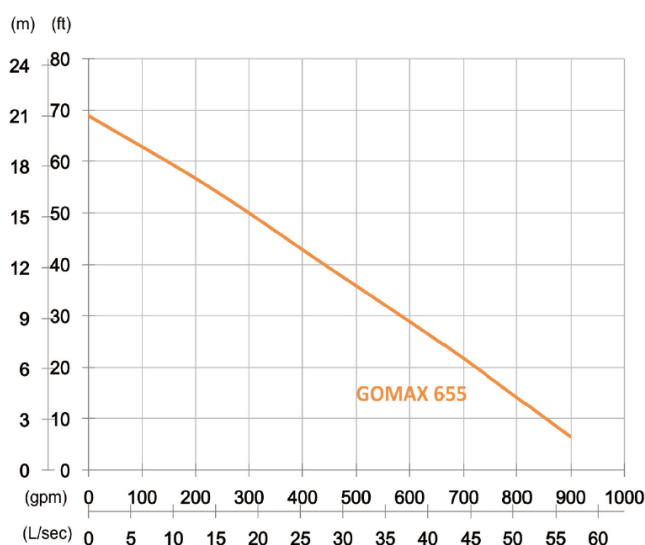

unit : mm

Weight : 138kg / 304 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
D.O.L
Circle Thermal
Protector
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8

Accessories

GRN-04




GOMAX 475

Single Channel Sewage Pump 50Hz

PRORIL

Pump Specifications

OUTPUT	7.5KW	10HP
HEAD	Rated: 16m	Max: 26m
FLOW	Rated: 20L/s	Max: 40L/s
SHAFT SPEED	1450rpm	
OUTLET	100mm	

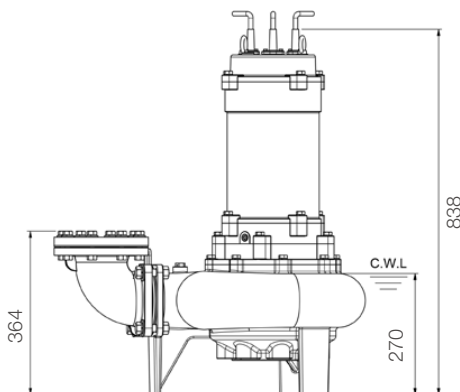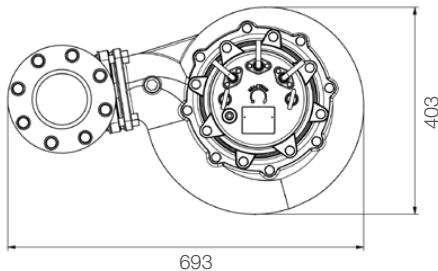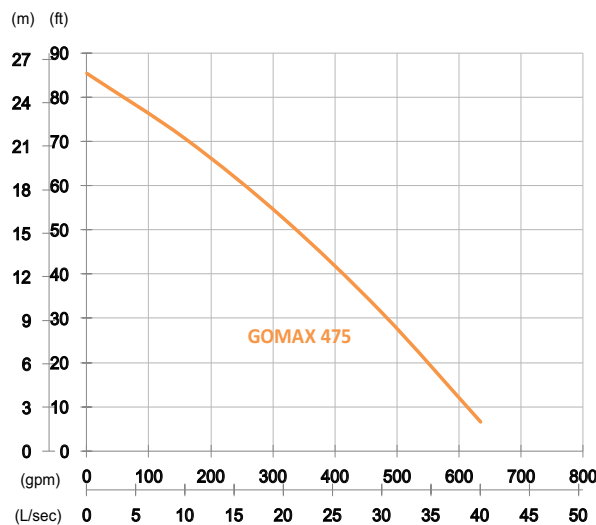

unit : mm

Weight : 142kg / 313 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
D.O.L
Circle Thermal
Protector
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8



Accessories

GRN-04

GOMAX 675

Single Channel Sewage Pump 50Hz

PRORIL

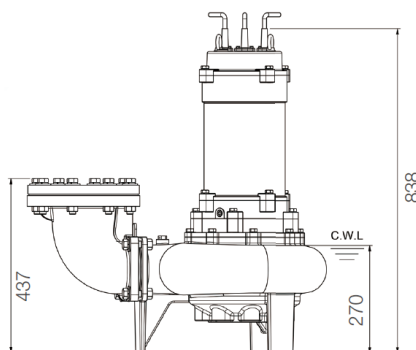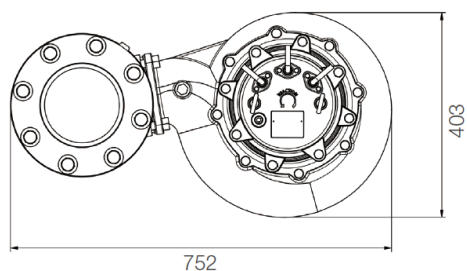


unit : mm

Weight : 148kg / 326 lbs

Pump Specifications

OUTPUT	7.5KW	10HP
HEAD	Rated: 13.5m	Max: 25m
FLOW	Rated: 33.3L/s	Max: 66.6L/s
SHAFT SPEED	1450rpm	
OUTLET	150mm	

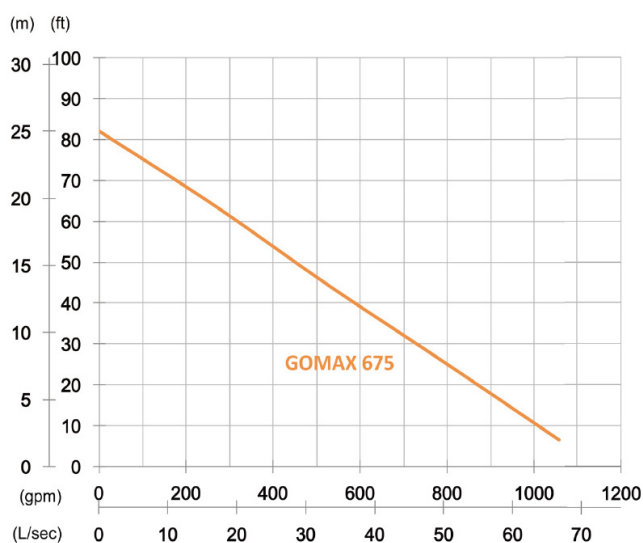

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
D.O.L
Circle Thermal
Protector
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8



Accessories

GRN-04

GOMAX 4110

Single Channel Sewage Pump 50Hz

PRORIL

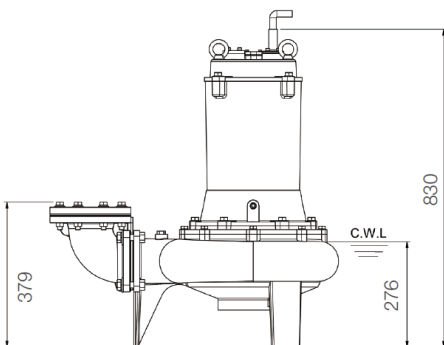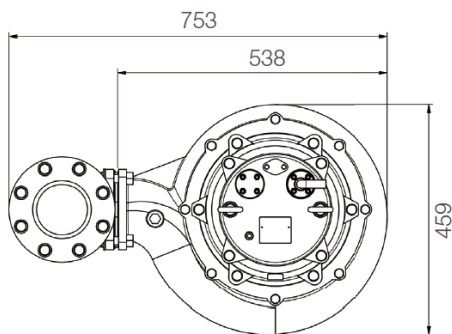


unit : mm

Weight : 167kg / 368 lbs

Pump Specifications

OUTPUT	11KW	15HP
HEAD	Rated: 22m	Max: 30m
FLOW	Rated: 25L/s	Max: 53.3L/s
SHAFT SPEED	1450rpm	
OUTLET	100mm	

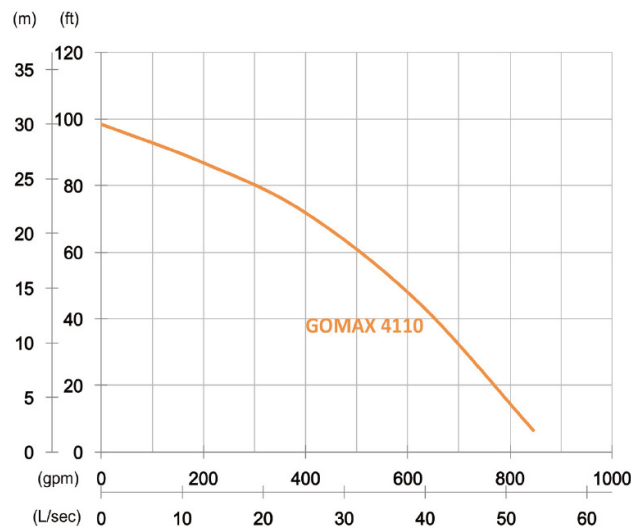

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
D.O.L
Circle Thermal
Protector
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8

Accessories

GRN-04



GOMAX 6110

Single Channel Sewage Pump 50Hz

PRORIL

Pump Specifications

OUTPUT	11KW	15HP
HEAD	Rated: 17m	Max: 30m
FLOW	Rated: 40L/s	Max: 75L/s
SHAFT SPEED	1450rpm	
OUTLET	150mm	

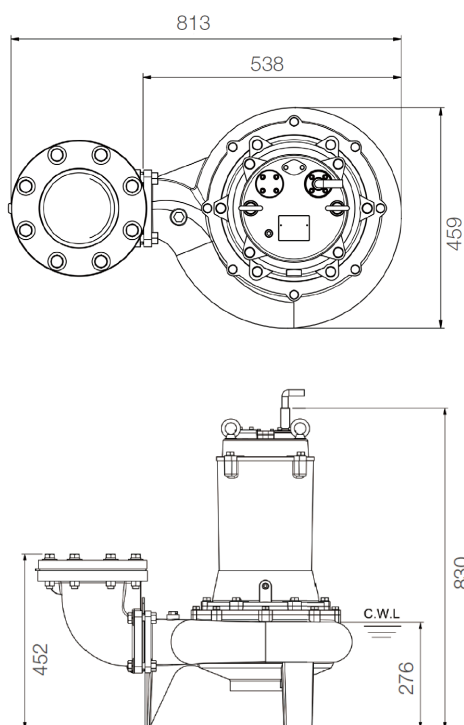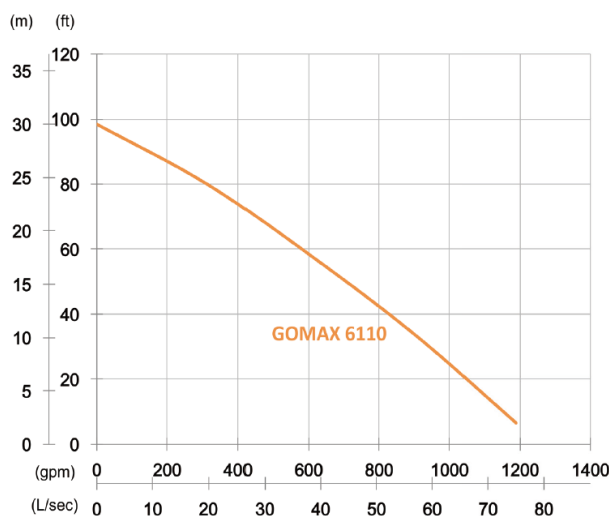

unit : mm

Weight : 175kg / 386 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
D.O.L
Circle Thermal
Protector
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8

Accessories

GRN-04

GOMAX 4150




Single Channel Sewage Pump 50Hz

PRORIL



Pump Specifications

OUTPUT	15KW	20HP
HEAD	Rated: 26m	Max: 35m
FLOW	Rated: 30L/s	Max: 66.6L/s
SHAFT SPEED	1450rpm	
OUTLET	100mm	

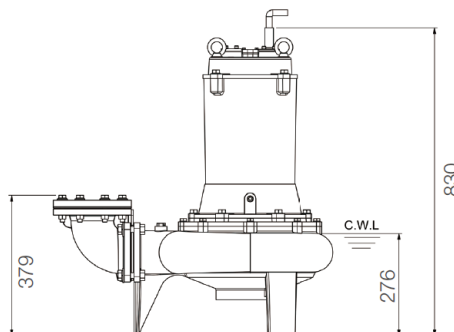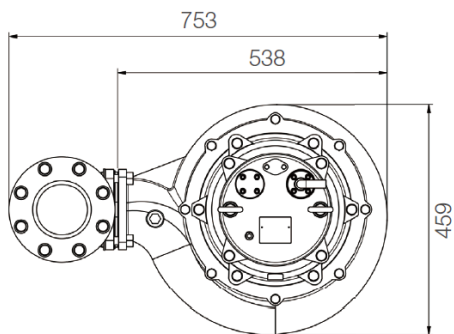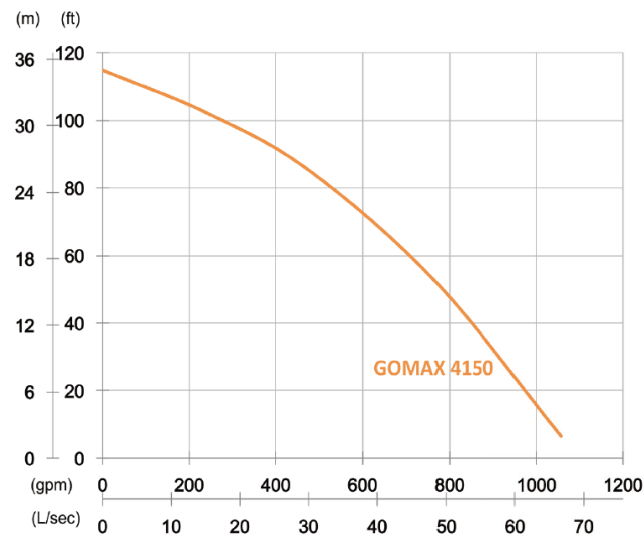

unit : mm

Weight : 178kg / 392 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
D.O.L
Circle Thermal
Protector
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature
40°C

Max Submersion Depth
20m

pH Range
pH 5 - pH 8

Accessories
GRN-04




GOMAX 6150

Single Channel Sewage Pump 50Hz

PRORIL

Pump Specifications

OUTPUT	15KW	20HP
HEAD	Rated: 22m	Max: 35m
FLOW	Rated: 41.6L/s	Max: 86.6L/s
SHAFT SPEED	1450rpm	
OUTLET	150mm	

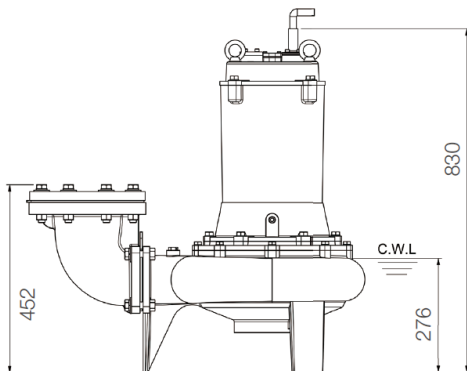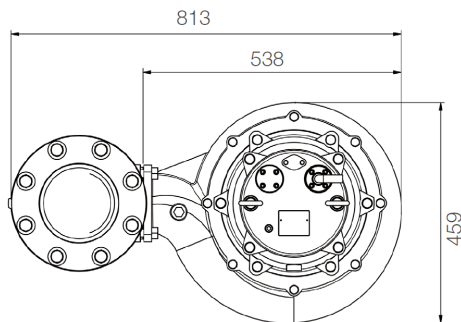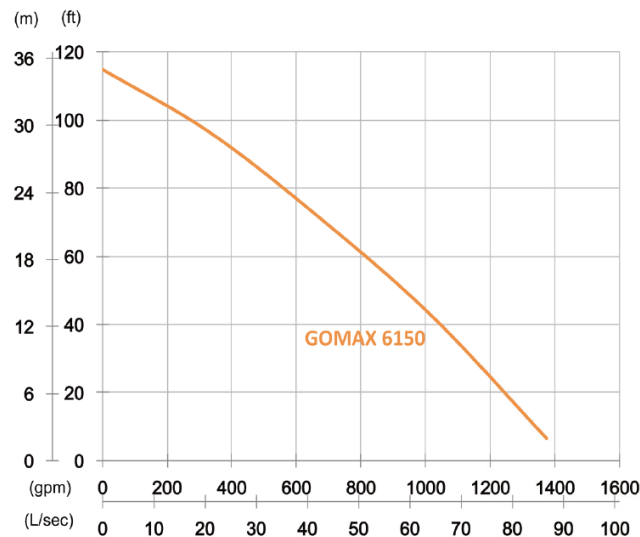

unit : mm

Weight : 186kg / 410 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
D.O.L
Circle Thermal
Protector

Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature
40°C

Max Submersion Depth
20m

pH Range
pH 5 - pH 8

Accessories
GRN-04




GOMAX 4220

Single Channel Sewage Pump 50Hz

PRORIL

Pump Specifications

OUTPUT	22KW	30HP
HEAD	Rated: 30m	Max: 42m
FLOW	Rated: 40L/s	Max: 75L/s
SHAFT SPEED	1450rpm	
OUTLET	100mm	

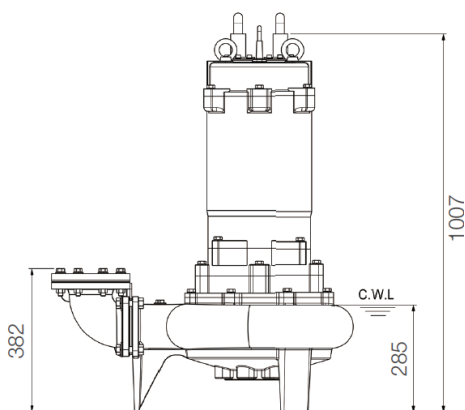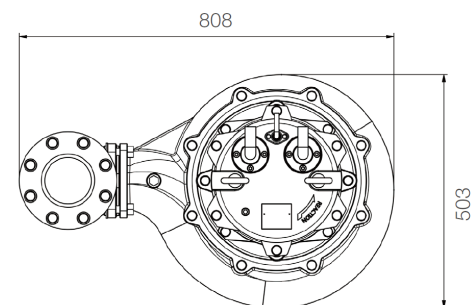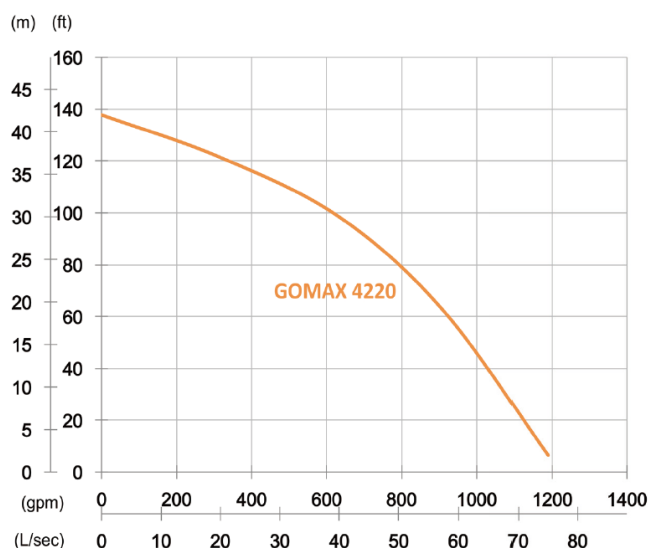

unit : mm

Weight : 256kg / 564 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Miniature Thermal Protectors
Starter: Star-Delta, D.O.L

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8

Accessories

GRN-04

GOMAX 6220




Single Channel Sewage Pump 50Hz

PRORIL



Pump Specifications

OUTPUT	22KW	30HP
HEAD	Rated: 20m	Max: 42m
FLOW	Rated: 68.3L/s	Max: 98.3L/s
SHAFT SPEED	1450rpm	
OUTLET	150mm	

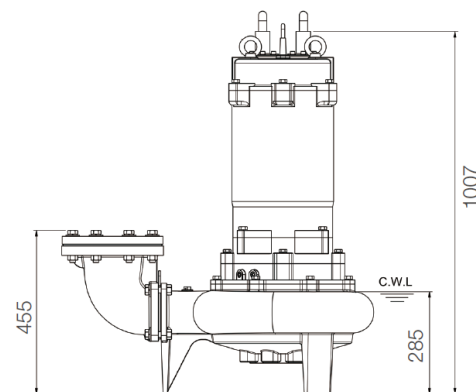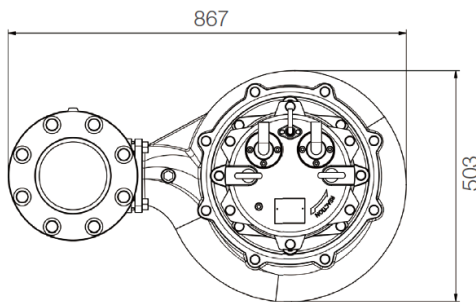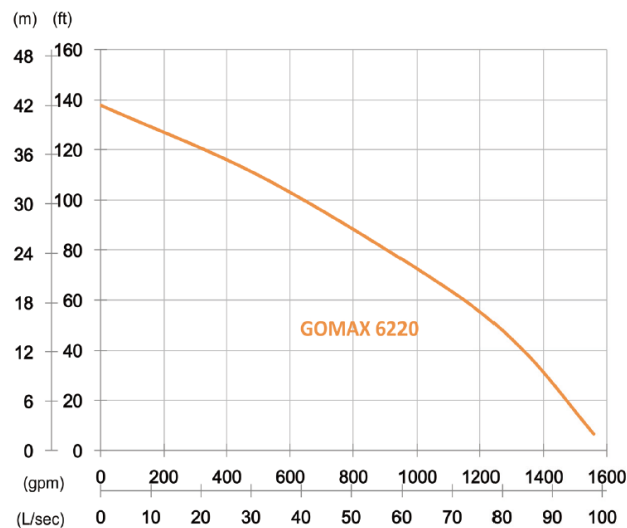

unit : mm

Weight : 262kg / 578 lbs

Features

Pump Type

Electric Submersible Pumps
3-Phase

Motor

Type: Induction Motor
Poles: 4 Pole
Insulation: Class F
Protector: Star-Delta
Miniature Thermal
Protectors
Starter: Star-Delta

Lubricant

Food Grade (ISO VG32)

Impeller Type

Single Channel

Shaft Seal

Double Mechanical Seal
Silicon Carbide VS Ceramic/
Carbon

Bearings

C3 Shielded ball bearings

Cable

PVC (CSA Certified)/H07RN-F
10mm or longer upon request

Materials

Pump Casing: Gray Iron
Impeller: Gray Iron
Motor Frame: Gray Iron
Motor Shaft: Stainless Steel
Mouth Ring: Copper Alloy

Max. Liquid Temperature

40°C

Max Submersion Depth

20m

pH Range

pH 5 - pH 8

Accessories

GRN-04